

RD-101

REFERENCE DA CONVERTER

INPUT
MENU
STANDBY

△
SELECT
▽

RD-101

VA

△
MUTE
▽

REFERENCE SERIES



VITUS AUDIO
FOREVER NOW

RD-101.

The latest in a noble tradition

Our RD-101 DAC/network streamer is designed to deliver the very qualities of reproduction that we have strived to recreate since the day we founded Vitus Audio – namely, the highest attainable degrees of neutrality, detail and dynamism.

Unlike its predecessor, the RD-101 is purely a DAC and does not include a line-stage. It offers instead a comprehensive range of regular inputs and, crucially, its own streaming board for use with an additional ethernet input. Hence it represents the ideal partner for our RI-101 Mk.II and SIA-025 Mk.II Vitus Integrated amplifiers.

Once connected, the RD-101 operates as a fully-functional network streamer that will stream Tidal, Qobuz, Spotify and Deezer. It will also play content stored on a local NAS or a shared folder on a computer – all controlled by the MConnect App on your phone or tablet.

The RD-101 will also act as a one-box streaming DAC, requiring only a network connection, a music subscription and a tablet.

Other significant changes from the RD-100 include new DAC architecture, a new power supply and an improved output stage – which refinements combine to achieve a ‘sonic leap’ from the RD-100, bringing it closer in sophistication and functionality to our Signature series SCD-025 Mk.II or SD-025.

The overall Vitus Audio ethos is, if you like, an uncompromising homage to great art. The qualities of total silence, great sonic depth and a spaciousness of sound-stage bring the listener unbelievably close to any musical performance. And the RD-101 remains unerringly true to this inspiring vision.

“If you’re looking for a DAC that is effortlessly musical and doesn’t sound in any way ‘digital’ the RD-101 should be right at the top of your audition list.”



Audio Therapy UK



OUTPUT	XLR Analog		RCA Analog		
Available	1 (L+R)	or	1 (L+R)		
Impedance	75Ω		75Ω		
Frequency response	+800kHz		+800kHz		
Signal to noise ratio	>110dB @ 1kHz		>110dB @ 1kHz		
THD + noise	<0.01%		<0.01%		
DAC					
Master clock	24.576 MHz +/- 5ppm				
DAC	ES9028PRO				
DIGITAL AUDIO INPUT	USB	AES/EBU		S/PDIF	Streamer
Available	1x USB B	2x XLR		2x RCA	1x RJ45
Impedance			110Ω	75Ω	
Sample rate	384 kHz + DSD128		192kHz	192kHz	192kHz + DSD 64
Resolution	24bit		24bit	24bit	24bit
POWER CONSUMPTION					
Standby	<1W				
Operation	25W				
DIMENSIONS					
Height	103mm including feet				
Width	435mm				
Depth	396mm / 431mm with binding post				
Weight	12kg				

RD-101

DEVICE OVERVIEW

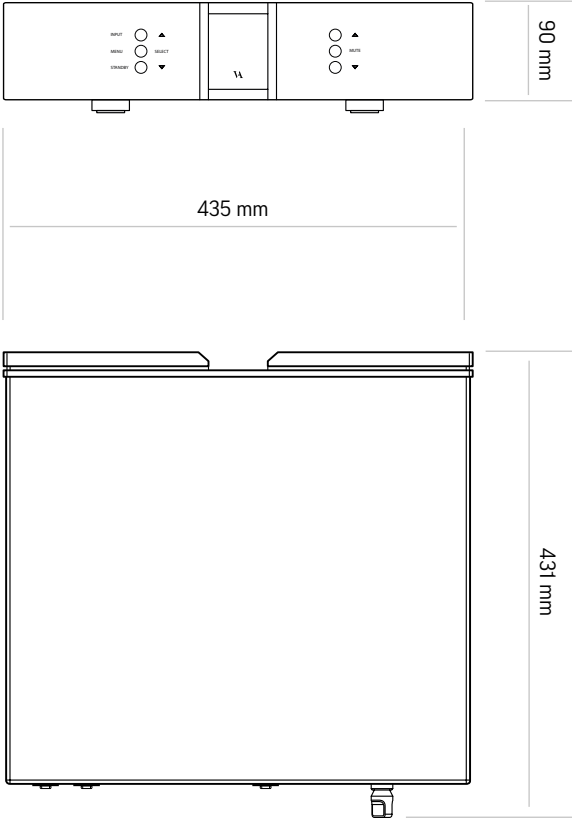

Material: Aluminium for body parts

Dimensions (H x W x D): 103 x 435 x 431 (mm)

Total weight: 12Kg



